


1.) Structure:

Item		Specification
Conductor	Material	Bare Copper
	Construction	1C / 0.58mm
	Diameter	0.58 ± 0.005mm
Insulation	Material	FEP
	Average Thickness	0.21mm
	Diameter	1.0 ± 0.02mm
Twisted		Refer to structure figure
Divider	Material	HDPE(4.7mm)
Rip Cord		Nylon rope
Jacket	Material	45P LS-PVC
	Average Thickness	0.45 ± 0.05mm
	Diameter	6.0 ± 0.2mm

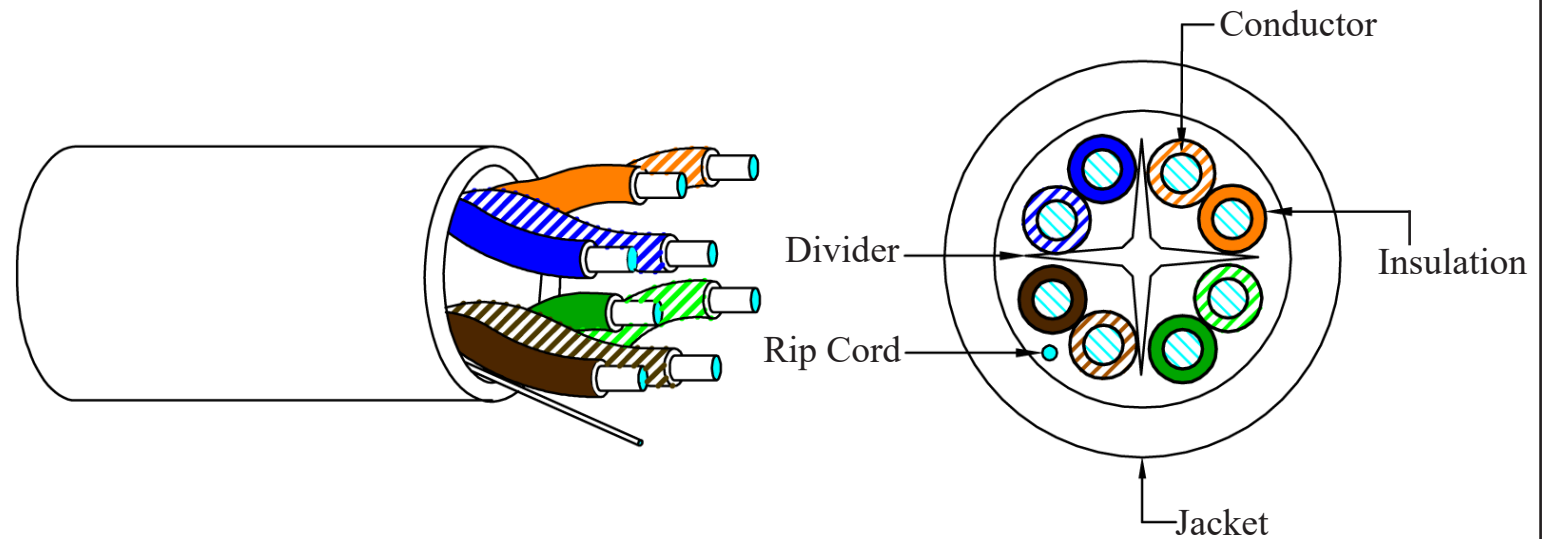

2.) Wire construction

Pair	Wire Arrangement	Twist Pitch
1P	Blue / Blue + White	15.3mm
2P	Orange / Orange + White	11.2mm
3P	Green / Green + White	13.7mm
4P	Brown / Brown + White	9.8mm


3.) Characteristic:

1. Electrical properties: Refer to TIA/EIA-568C.2
2. Physical properties
 - (1.) Insulation: Tensile strength: 3000psi:
(unaged) Elongation: 400%
 - (2.) Jacket: Tensile strength: 2100psi:
(unaged) Elongation: 200%
 - (3.) Flame Test: N/A
3. Conductor Resistance:
 - 73.2 OHM/km at 20°C Max
 - Spark Test: 1750V AC
 - Dielectric Strength: 1500V AC.2S
4. Center degree: ≥93%

4.) Packing

Style: Pull box

RoHS

Part #	CP-C6-SDP-XX	Part #	Color
Title	1000ft Bare Copper Cat6 Bulk Cable, Plenum, Solid Wire	CP-C6-SDP-BL	Blue
		CP-C6-SDP-GY	Grey
Unit	 PI Manufacturing Corp.		
mm			